
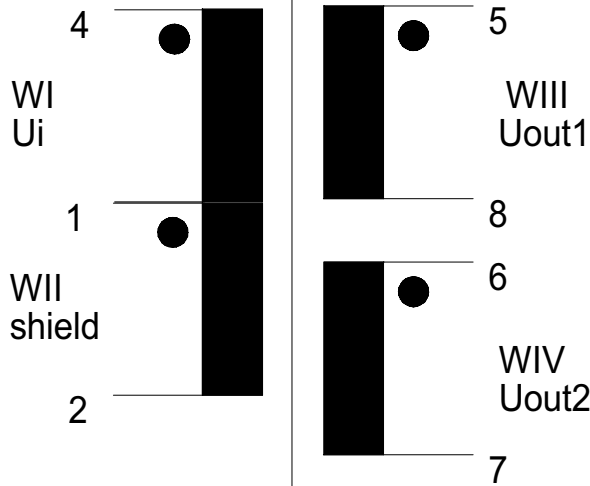


Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:
SKNY256-9-6.5

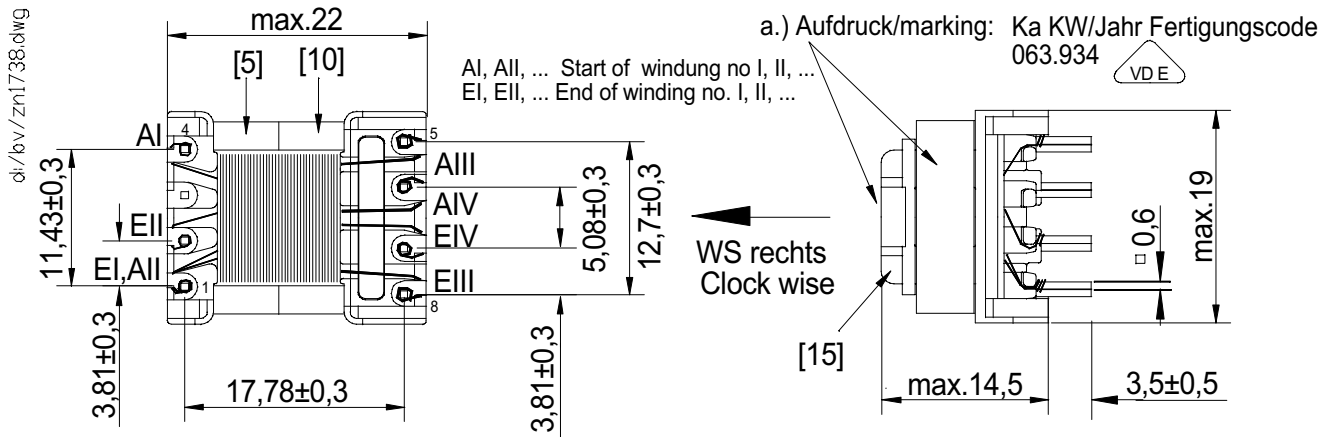

Core / material / air gap / AL	E16/5 K2006 or equiv.	
Nominal inductance	LI= 0,89mH ±10%	
maximum transmissible power	9W	
Working frequency	44 - 132 KHz	
Transformation ratio	96 : 45 : 10 : 10	
dielectric strength (50Hz/2s)	Prim-Sec = 4kV/50Hz/2sec.	
Nominal Current		
Design in comp. with standard	EN60950 / EN61558	
Working / storage temperature	-25°C- +120°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
leakage inductance	max. 50 µH	

Remarks : a.) marking

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:
Uwe Dickhut

Date:
06.11.2006

Design regulation no.:
063.934

Index:
03

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature