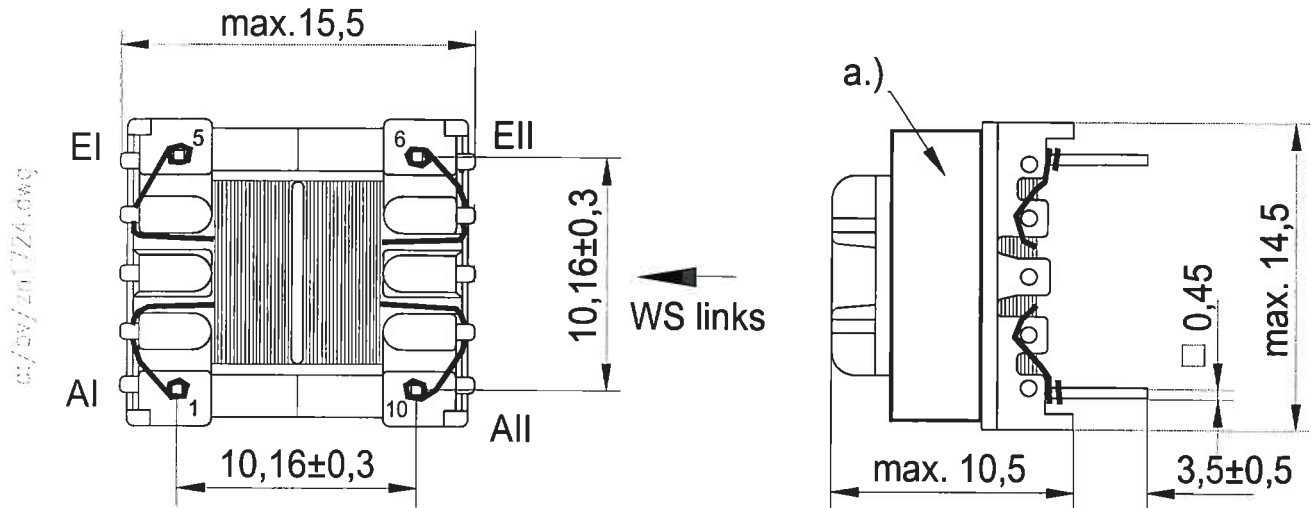


# Technical Data Sheet

 Customer:  
**Kaschke Göttingen**

 Part designation:  
**SP-E 13/4**

 Customer part no.:  
**CM-0,24-33**


Core / material / air gap / AL	<b>E13/4 K4000 or äquiv.</b>	
Nominal inductance	<b>L=2x33mH±30%</b>	
maximum transmissible power		
Working frequency		
Transformation ratio	<b>1:1</b>	
dielectric strength (50Hz/2s)	<b>WI-WII=0,5kVeff</b>	
Nominal Current		
Design in comp. with standard	<b>S06</b>	
Working / storage temperature	<b>-25°C- +125°C</b>	<b>-25°C- +85°C</b>
Miscellaneous		

**Remarks :** **Muster nicht RoHS-Konform!**  
**Serie RoHS-Konform!**  
**Muster zur Prüfung und zur schriftlichen Freigabe.**

 Measuring device of L: **W&K 3245**

 Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

**Markus Häpe**

Date:

**27.08.2007**

Design regulation no:

**071.925**

Index:

**00**
**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature