


Magn. Formkenngrößen/Satz
eff. magn. parameters/set

Formfaktor <i>core factor</i>	$C_1 =$	1,55 mm ⁻¹
Eff. magn. Weglänge <i>eff. magn. path length</i>	$l_e =$	51,4 mm
Eff. magn. Querschnitt <i>eff. magn. cross section</i>	$A_e =$	33,1 mm ²
Eff. magn. Volumen <i>eff. magn. volume</i>	$V_e =$	1700 mm ³
Gewicht <i>weight</i>	$G \approx$	9 g

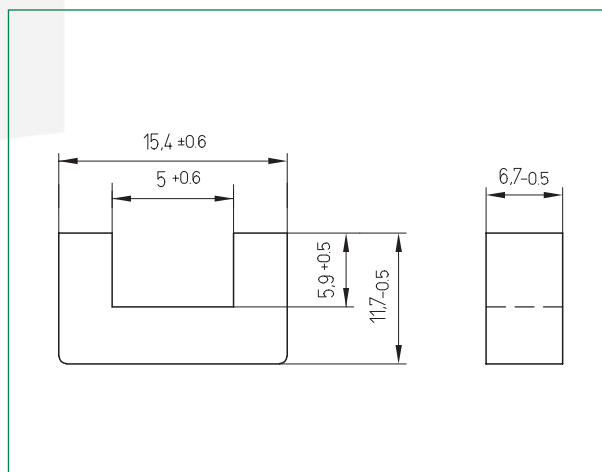

Werkstoff <i>material</i>	A_L -Wert <i>A_L value</i> nH	Toleranz <i>tolerance</i>	Luftspalt <i>airgap</i> mm	μ_e	Bestellnummer <i>order number</i>
K 2004	1250	± 25%	-	≈ 1540	325 150600 024
K 2006	1300	± 25%	-	≈ 1600	325 150600 026
K 2008	1450	± 25%	-	≈ 1800	325 150600 028
K 6000	2800	± 30%	-	≈ 3450	325 150600 006

Bei Anwendung in Leistungsübertragern
for application in power transformers

Werkstoff <i>material</i>	Messbedingungen <i>test conditions</i>	Verluste/Satz <i>losses/set</i>
K 2004	25kHz, 200mT, 100°C	≤ 0,30 W
K 2006	25kHz, 200mT, 100°C	≤ 0,19 W
K 2008	100kHz, 200mT, 100°C	≤ 0,85 W

gemessen an zwei U-Kernen / *measured on a set of two U cores*

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
 Fon +49 (0) 551-5058-6 · Fax +49 (0) 551-65756
 kaschke.de