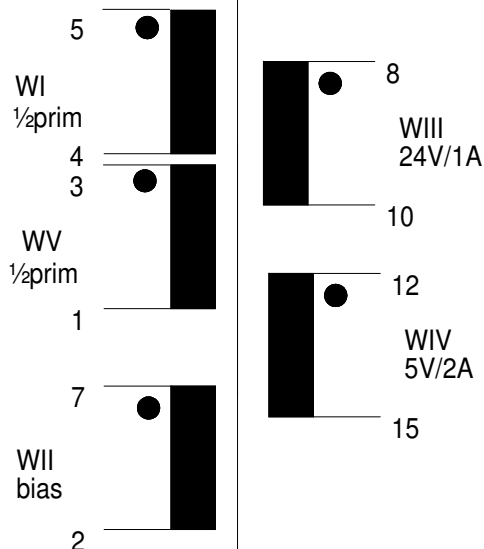
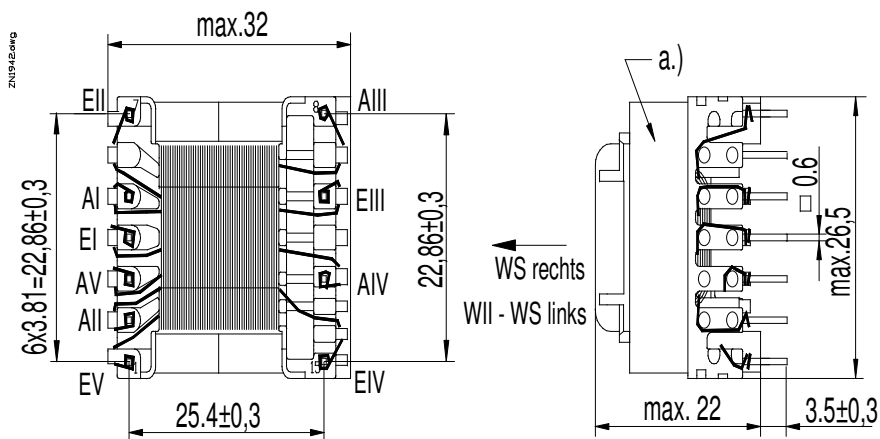


Technical Data Sheet

Customer:
Kaschke Göttingen
Part designation:
SP-EF 25
Customer part no.:
SKOP245-24-5-34


Core / material / air gap / AL	E25/7 K2006 or equiv.	
Nominal inductance	LI+LV = 504 µH ±10%	
maximum transmissible power	34W	
Working frequency	132 kHz	
Transformation ratio	64:7:13:3:	
dielectric strength (50Hz/2s)	Prim-Sec = 3,75KV	
Nominal Current		
Design in comp. with standard	EN 61558	
Working / storage temperature	-25 °C- 120 °C	-25 °C- 85 °C
Miscellaneous	DIN 40040	

Remarks : **a.) marking**
Measuring device of L: W&K 3245
Measuring conditions of L: 50 mV/10 KHz

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:
Uwe Dickhut
Date:
10.04.2006
Design regulation no.:
095.953
Index:
01
PLEASE GIVE US YOUR WRITTEN RELEASE
Date
Signature