


Magn. Formkenngrößen/Satz
eff. magn. parameters/set

Formfaktor core factor	$C_1 =$	0,33 mm ⁻¹
Eff. magn. Weglänge eff. magn. path length	$l_e =$	41,8 mm
Eff. magn. Querschnitt eff. magn. cross section	$A_e =$	129 mm ²
Min. magn. Querschnitt min. magn. cross section	$A_{min} =$	127 mm ²
Eff. magn. Volumen eff. magn. volume	$V_e =$	5370 mm ³
Gewicht/Stück weight/part	$G \approx$	13 g

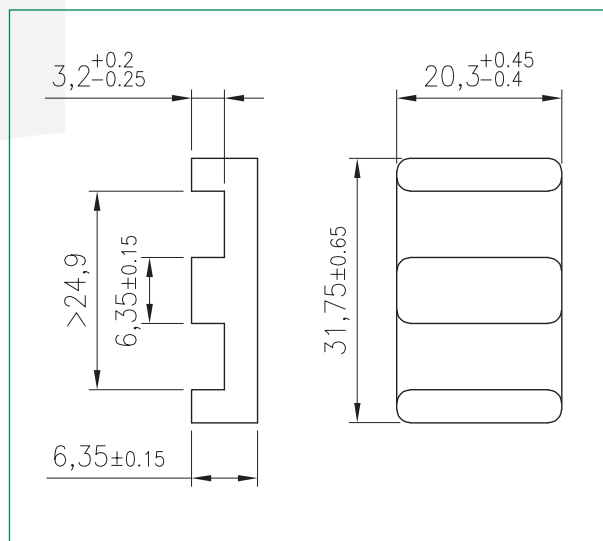

Werkstoff material	A_L -Wert A_L value nH	Toleranz tolerance	Luftspalt airgap mm	μ_e	Bestellnummer order number
K 2001	5000	± 25%	-	≈ 1260	382 326501 221
K 2008	7150	± 25%	-	≈ 1810	382 326501 028
K 2010	7150	± 25%	-	≈ 1810	382 326501 029

Bei Anwendung in Leistungsübertragern
for application in power transformers

Werkstoff material	Messbedingungen test conditions	Verluste/Satz losses/set
K 2001	500kHz, 50mT, 100°C	≤ 0,9 W
K 2008	100kHz, 200mT, 100°C	≤ 2,7 W
K 2010	100kHz, 200mT, 100°C	≤ 2,3 W

gemessen an zwei PE-Kernen / measured on a set of two PE cores

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de