





# Technical Data Sheet

Customer:  
**Kaschke Göttingen**

Part designation:  
**SP-E 13/6**

Customer part no.:  
**SNK500-6-3**

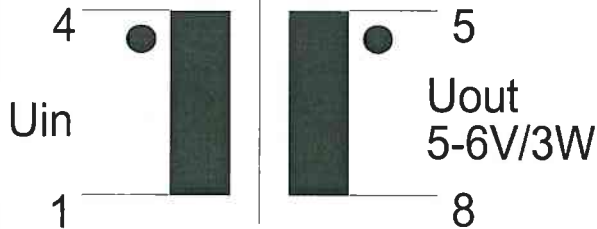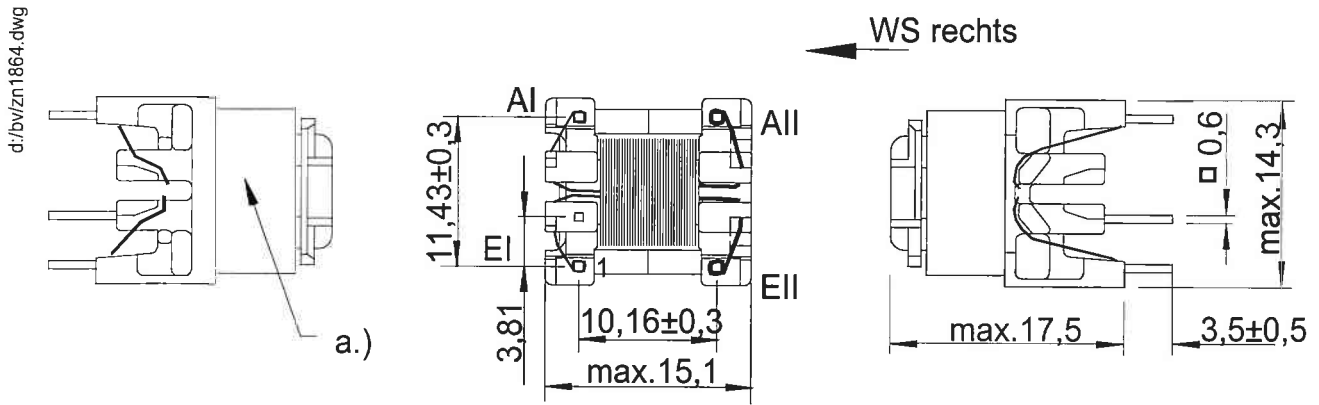

Core / material / air gap / AL	<b>E13/6 K2006 or equiv.</b>	
Nominal inductance	<b>LI= 2,80 mH ±10%</b>	
maximum transmissible power	<b>3W (50°C)</b>	
Working frequency	<b>44kHz</b>	
Transformation ratio	<b>132:17</b>	
dielectric strength (50Hz/2s)	<b>prim-sec:3,75KV</b>	
Nominal Current		
Design in comp. with standard	<b>S08</b>	
Working / storage temperature	<b>-25°C- 115°C</b>	<b>-25°C- 115°C</b>
Miscellaneous	<b>F (DIN 40040)</b>	
switcher	<b>link 500/501-uni</b>	

Remarks : **a.) marking  
creepage min.6mm**

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:  
**Uwe Dickhut**

Date:  
**15.03.2004**

Design regulation no.:  
**096.902**

Index:  
**00**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature