


Magn. Formkenngrößen/Satz
eff. magn. parameters/Satz

Formfaktor <i>core factor</i>	$C_1 =$	0,33 mm ⁻¹
Eff. magn. Weglänge <i>eff. magn. path length</i>	$l_e =$	315 mm
Eff. magn. Querschnitt <i>eff. magn. cross section</i>	$A_e =$	950 mm ²
Eff. magn. Volumen <i>eff. magn. volume</i>	$V_e =$	299600 mm ³
Gewicht/Stück <i>weight/part</i>	$G \approx$	750 g

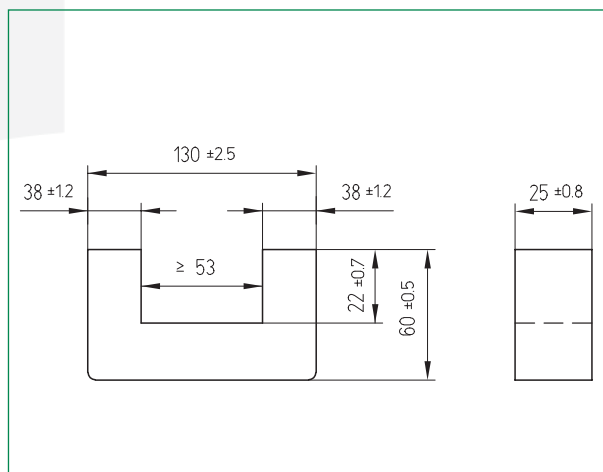

Werkstoff <i>material</i>	A_L -Wert <i>A_L value</i> nH	Toleranz <i>tolerance</i>	Luftspalt <i>airgap</i> mm	μ_e	Bestellnummer <i>order number</i>
K 2004	6500	± 25%	-	≈ 1700	325 302500 024
K 2006	6900	± 25%	-	≈ 1810	325 302500 026
K 2008	7500	± 25%	-	≈ 1970	325 302500 028

Bei Anwendung in Leistungsübertragern
for application in power transformers

Werkstoff <i>material</i>	Messbedingungen <i>test conditions</i>	Verluste/Satz <i>losses/set</i>
K 2004	25kHz, 100mT, 100°C	≤ 12,6 W
K 2006	25kHz, 100mT, 100°C	≤ 8,5 W
K 2008	25kHz, 100mT, 100°C	≤ 6,3 W

gemessen an zwei U-Kernen / *measured on a set of two U cores*

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
 Fon +49 (0) 551-5058-6 · Fax +49 (0) 551-65756
 kaschke.de