


Magn. Formkenngrößen/Satz
eff. magn. parameters/set

Formfaktor <i>core factor</i>	$C_1 =$	0,86 mm ⁻¹
Eff. magn. Weglänge <i>eff. magn. path length</i>	$l_e =$	86,0 mm
Eff. magn. Querschnitt <i>eff. magn. cross section</i>	$A_e =$	100 mm ²
Eff. magn. Volumen <i>eff. magn. volume</i>	$V_e =$	8600 mm ³
Gewicht <i>weight</i>	$G \approx$	47 g

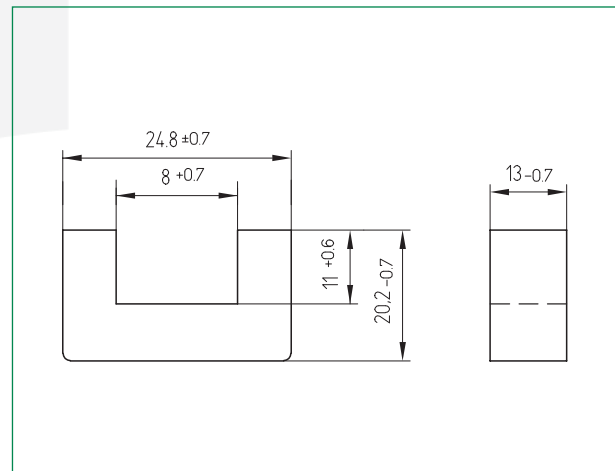

Werkstoff <i>material</i>	A_L -Wert <i>A_L value</i> nH	Toleranz <i>tolerance</i>	Luftspalt <i>airgap</i> mm	μ_e	Bestellnummer <i>order number</i>
K 2004	2350	± 25%	-	≈ 1610	325 251300 024
K 2006	2400	± 25%	-	≈ 1650	325 251300 026
K 2008	2750	± 25%	-	≈ 1880	325 251300 028

Bei Anwendung in Leistungsübertragern
for application in power transformers

Werkstoff <i>material</i>	Messbedingungen <i>test conditions</i>	Verluste/Satz <i>losses/set</i>
K 2004	25kHz, 200mT, 100°C	≤ 1,5 W
K 2006	25kHz, 200mT, 100°C	≤ 1,0 W
K 2008	100kHz, 200mT, 100°C	≤ 4,3 W

gemessen an zwei U-Kernen / *measured on a set of two U cores*

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
 Fon +49 (0) 551-5058-6 · Fax +49 (0) 551-65756
kaschke.de