


Magn. Formkenngrößen/Satz
eff. magn. parameters/set

Formfaktor <i>core factor</i>	$C_1 =$	3,67 mm ⁻¹
Eff. magn. Weglänge <i>eff. magn. path length</i>	$l_e =$	12,2 mm
Eff. magn. Querschnitt <i>eff. magn. cross section</i>	$A_e =$	3,3 mm ²
Min. magn. Querschnitt <i>min. magn. cross section</i>	$A_{min} =$	2,6 mm ²
Eff. magn. Volumen <i>eff. magn. volume</i>	$V_e =$	40,6 mm ³
Gewicht <i>weight</i>	$G \approx$	0,2 g

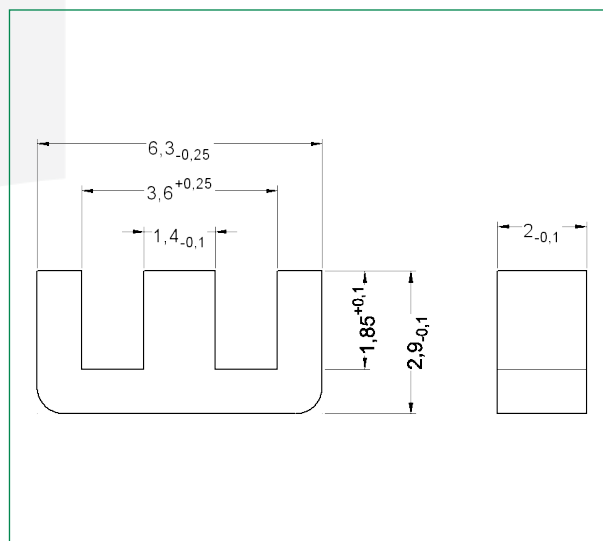

Werkstoff <i>material</i>	A_L -Wert A_L value nH	Toleranz <i>tolerance</i>	Luftspalt <i>airgap</i> mm	μ_e	Bestellnummer <i>order number</i>
K 2006	340	± 30%	-	≈ 1000	320 060200 026
K 4000	600	± 30%	-	≈ 1750	320 060200 004
K 6000	700	± 30%	-	≈ 2050	320 060200 006

Bei Anwendung in Leistungsübertragern
for application in power transformers

Werkstoff <i>material</i>	Messbedingungen <i>test conditions</i>	Verluste/Satz <i>losses/set</i>
K 2006	50kHz, 200mT, 100°C	≤ 0,011 W

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 551-5058-6 · Fax +49 (0) 551-65756
kaschke.de