


Schalenkern SK 11 x 7
Pot core SK 11 x 7

Magn. Formkenngrößen/Satz
eff. magn. parameters/set

Formfaktor <i>core factor</i>	$C_1 =$	0,93 mm ⁻¹
Eff. magn. Weglänge <i>eff. magn. path length</i>	$l_e =$	15,4 mm
Eff. magn. Querschnitt <i>eff. magn. cross section</i>	$A_e =$	16,5 mm ²
Eff. magn. Volumen <i>eff. magn. volume</i>	$V_e =$	253 mm ³
Gewicht <i>weight</i>	$G \approx$	2 g

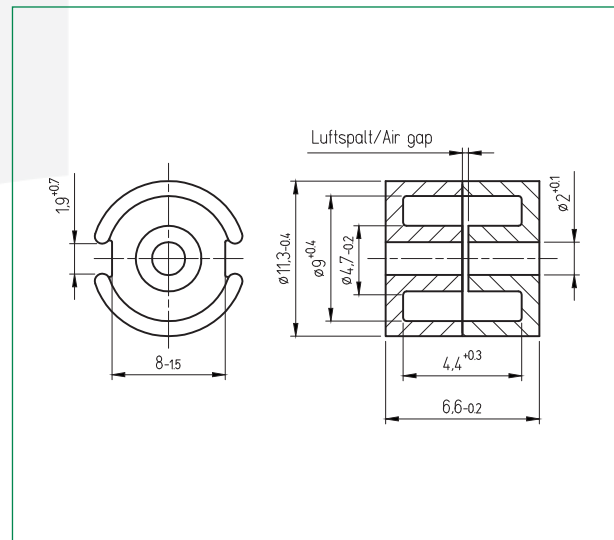

Werkstoff <i>material</i>	A_L -Wert A_L value nH	Toleranz <i>tolerance</i>	Luftspalt <i>airgap</i> mm	μ_e	Bestellnummer <i>order number</i>
K 2005	1700	± 25%	-	≈ 1350	326 110000 025
K 2006	1650	± 25%	-	≈ 1300	326 110000 026
K 4000	2800	± 25%	-	≈ 2230	326 110000 004
K 6000	4300	± 30%	-	≈ 3420	326 110000 006
K 2005	250	± 10%	≈ 0,06	≈ 200	326 110250 025
K 2005	160	± 5%	≈ 0,10	≈ 125	326 110160 025
K 2005	100	± 3%	≈ 0,20	≈ 80	326 110100 025

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
 Fon +49 (0) 551-5058-6 · Fax +49 (0) 551-65756
kaschke.de